

Dust eliminator unit of recirculation type DEU-CM

The dust eliminator unit of recirculation type DEU-CM is used for the high efficient cleaning of air from all types of dust (including finely dispersed solid aerosols).

CHARACTERISTICS

| Characteristics | Parameter |
|--|-----------|
| Nominal air flow, m ³ /h | 1000 |
| Efficiency of cleaning, not less % | |
| - without additional filter | 99 |
| - with additional filter, up to | 99,999 |
| Reserve of static (free) pressure at the connection to system of ventilation, Pa | 500 |
| Inlet socket internal diameter, mm | 160 |
| Power of engine, kW | 2,2 |
| Dimensions, mm: | |
| Length | 764 |
| Width | 634 |
| Height | 1742 |
| Weight, kg | 173 |



Fig. 1. DEU-CM

GENERAL DEVICE

The unit is equipped by the filtering element of a cartridge type CFE and by the device for mechanical regeneration.

By request the DEU-CM unit may be equipped supplementary by the additional filter of type HEF of classes from F6 to H14 to ensure additional air cleaning from finely dispersed aerosols or from gaseous containants (carbon filter of CCF type). In this case the filter is installed on the upper part of the body of the unit that enlarges its height to 300 mm. The choice of an additional filter depends on the disperse qualities of aerosols captured and the requirements to the air clearness.

The unit consists of the following main parts: the body of filter, centrifugal ventilator, the cartridge filtering element of type CFE (hereinafter, in the text "a cartridge") and devices for mechanical regeneration of the cartridge. The DEU-CM unit has a removable door for the cartridge installing on one side. The cartridge is installed at the supporting angles, welded on the perimeter of the body, and is hermitically pressed to the body with a rubber sealing and special tightening devices. The sealing of the door is carried out through tightening rubber and the door is hermitically fixed to the body with screw clamps. The unit is equipped with an air distributing grid, installed in the outlet.. The unit is equipped with a removable box for dust collection.

The unit is equipped with 4 wheels and a handle, they permit to move the unit easily along the works and install in a place, suitable for servicing some technological equipment. The unit can be performed for a stationary usage as well, herewith instead of wheels the unit is equipped by special supporting handholds with the regulation.

For checking of the cartridge final pressure drop there is a sensor of pressure swing with the light signal in the unit. When the certain resistance is obtained by the cartridge, the light signals of the required regeneration submit. The regeneration of filtering cartridges is carried out periodically by mechanical devices and ventilator is switched off. While the unit is maintained, it can be equipped with different cantilever-turning devices or connected by air pipes with the sucker. The resistance of the said devices should not be more than the reserve of static ("free") pressure, specified in the table.

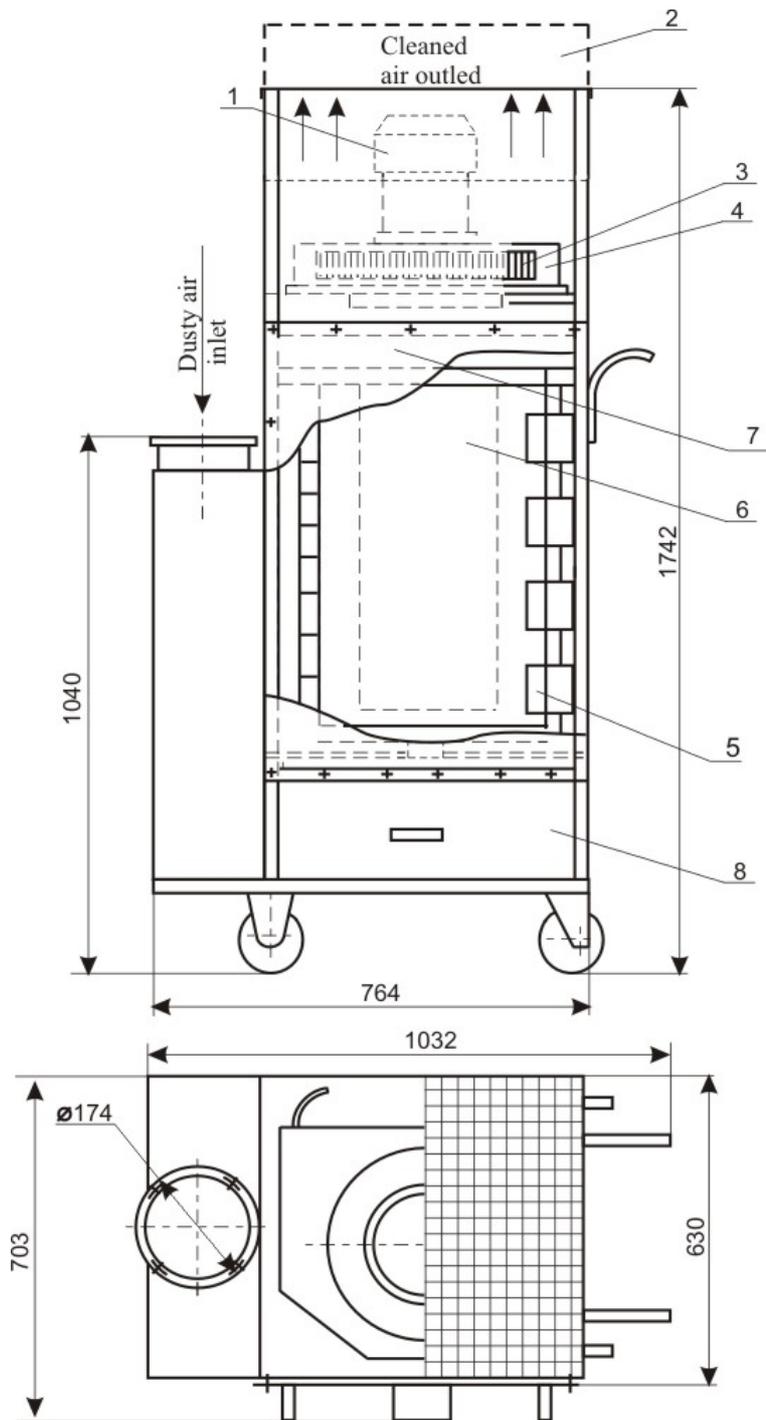


Fig. Scheme of DEU-CM unit
1 - motor; 2 - additional filter; 3 - wheel of ventilator; 4 - body of ventilator;
5 - device for mechanical cleaning; 6 - cartridge filtering element; 7 - door;
8 - box for collection of dust.